

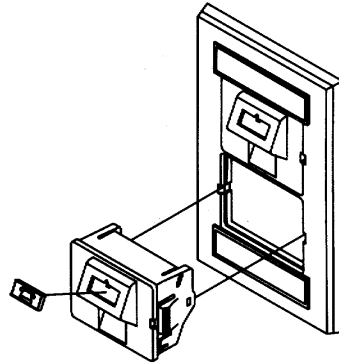


BLOCKS & PATCH PANELS	
Description	Part #
#66 punch-down block, M4 x 50, 50 pair capacity, #500 quick clip pattern. Cat-5. White.	S66M1-50 SIEMON
Bridging Clips — Used to connect adjacent quick clip on 66 block (above). SA1-100 SIEMONS	
12 port RJ45 mini-panel. Vertical mount w/bracket. Cat-5e. Black	30-8412B AIM
24 port RJ45 rack mount panel. Cat-5e. Black	30-7424B AIM

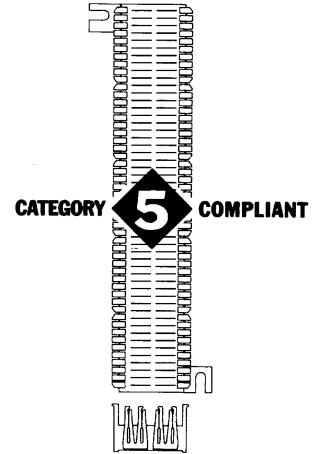

CAT-5 KEYSTONE SYSTEM					
Connector Type	Color	Insert Part #	Wall Plates (holds insert) single gang	Surface Mount Blocks (holds face plate)	Rack Patch Panel
BLANK INSERT	IVORY	30-9213 AIM	30-9209AIM* 30-9229 AIM** 1 insert port	TRS-JB1 TYT single gang ivory	30-7424B AIM 24 RJ45 ports Cat-5e black
RJ11	IVORY	30-9200 AIM	30-9210 AIM* 30-9220 AIM** 2 insert ports		
RJ12	IVORY	30-9201 AIM	30-9211 AIM* 3 insert ports		
RJ45 cat 5	BLACK IVORY ORANGE	30-7511 AIM 30-7518 AIM 30-7517 AIM	30-9223 AIM* 4 insert ports		
BNC cut-out	IVORY	30-9214 AIM (insert w/coax cut-out)	30-9212 AIM* 6 insert ports		
F-type cut-out			* ivory **stainless steel		

Cat 5e ACCESSORIES

Blocks, Surface (Wall) Mount, RJ45 Jacks, Cat 5 — **30-5198B AIM** (single port) **30-5298B AIM** (dual port).


Boots, RJ45 Plug — Multicolored boots to fit over wire entry into RJ45 plug. Available in black (BK), white (WH), red (RE), yellow (YE), blue (BU), green (GN), or gray (GY). **32-1900-(color) AIM.**

Coupler, RJ45, Cat 5 — In-line cat 5e coupler: **30-9241 AIM.**

Jumpers, RJ45, Cat 5 — Modular cables. **C5EJ-3 (3')**, **C5EJ-7 (7')**, **C5EJ-10 (10')**, **C5EJ-15 (15')**, **C5EJ-25 (25')**.

LanRover PRO — Cat 5 tester/analyzer with handy pouch and detachable remote. Measures cable length, tests for shorts, opens, mis-wires, reversals & split pair errors, identifies multiple faults, auto-off, one-ended testing, built-in tone generator, 2 line x 16 character LCD display. **TP600 TEST-UM**

LanScaper — A physical layer network management device, LanScaper combines the functions of a high-end cable tester and length measurement device with the capability to monitor and correct network problems connected with the physical layer and link conditions of the network. Conducts link tests to ID speed/capabilities and activity of network drops. Verifies functional speed capability of terminated unconnected cable runs, identifies port service (POTS, Ethernet, ISDN, Token Ring, etc). Automatically accesses DHCP hosts and obtains network information, tests cabling configuration. Identifies HUBS< NIC or auto MD/MDI-X devices. Blinks HUBS to ascertain connected configuration. Measures and reports any voltage on lines. Reports phantom power conditions per IEEE 802.3af. Wire maps network connections with remote identifiers. Generates multiple tone levels for signal tracing and cable identification. **NT700 TEST-UM.**



Plug, RJ45 modular — Cat 5e RJ45 plugs: **32-5998UL AIM.** Accessories: 200-016 ECL (wire stripper) , 7108 SARGENT (RJ45 crimping tool)

Punch Down Tool — Impact tool terminates wires on 66 & 110 clips. Spring loaded, fully adjustable. **PA3526 PAL** (tool only, no blade) **PA4527 PAL** (66 blade only, no tool) **PA4528 PAL** (110 blade only, no tool) **PA3540.1 PAL** (tool + both blades + leather pouch).

CAT 5 CABLE •24 AWG		
BELDEN #	# PAIRS	SPECIAL FEATURES:
1588A	2	
1590A	2	PLENUM RATED
1583A	4	MOST POPULAR Solid Wire, PVC
1624R	4	SHIELDED
1752A	4	STRANDED
1585A	4	PLENUM RATED
1872A	4	MEDIA-TWIST

