




SPEAKERS



QUAM SPEAKERS			
SIZE	"Z"	PART #	FEATURES
2 RND	3-4	2A05	MINIATURE
	8	2A05Z8	MINIATURE
2 x 6 OVAL	8	26A07Z8	GENERAL PURPOSE
2¼ RND	100	22A05Z100	MINIATURE
2½ RND	8	25A07Z8	MINIATURE
2½ SQ	45	25A07Z45	INTERCOM
	8	25C25Z8OT	INTERCOM, OUTDOOR TREATED
2¾ RND	8	27A05Z8	MINIATURE
2¾ SQ	45	25A05Z45	GENERAL PURPOSE
3 SQ	8	30A05Z8	MOBILE RADIO
	8	30C25Z8	AUTO HI-FI
	45	30A05Z45	INERCOM
3½ SQ	4	3A07OT	OUT DOOR
	45	3A07Z45OT	OUTDOOR TREATED
3x5 OVAL	8	35A05Z8	GENERAL PURPOSE COMM.
4 SQ	4	4C3PA	PUBLIC ADDRESS
	8	4A1Z8	GENERAL PURPOSE COMM.
	8	4C5Z8	GENERAL PURPOSE COMM.
	45	4A1Z45	INTERCOM
4 PA	8-10	4C10PA	COMMERCIAL SOUND, P.A.
4x6 OV	8	46C3Z8	AUTOMOTIVE
	3-4	46C5FR	AIRCRAFT
5 PC	3-4	5C3FR	AIRCRAFT
5¼ PC	3-4	5C5FR	AIRACRAFT
8 RND	8	8C10FECOB	HI FI, FOAM EDGE, COXIAL
	8	8C10FEPAXB	HI FI, EXTENDED RANGE
8 PC	8	8C10PAXB	COMM. SOUND, FULL RANGE
	70V	8C5PAX/TBL	SPKR/X-FORMER
	70V	C5/B70/W	SPKR/GRILL/X-FORMER




APF-15 ATLAS



AP-15T ATLAS

PAGING HORNS			
WATTS	X-FORMER?	FEATURES	PART #
5	NO 8 ohm	Outdoor horn. Economy.	WP7 PHI
12	NO 8 ohm	Round, for paging & general communications, flush mounts in walls and cabinets, 125° symmetrical dispersion. 6" dia. x 6"D	PA12F EV
15	NO 8 ohm	Round, indoor/outdoor, made in USA, 110° dispersion, omni-purpse industry standard, 8"W x 8"H x 9"D.	AP-15 ATLAS
15	YES 25v/70.7v	Round, indoor/outdoor, made in USA, 110° dispersion, omni-purpse industry standard, 8"W x 8"H x 9"D.	AP-15T ATLAS
15	NO 8 ohm	Round, for flush or recessed installations, 180° dispersion, 7" dia. x 3-7/16" H.	APF-15 ATLAS
15	NO 8 ohm	Round, indoor/outdoor, swivel bracket, 130° dispersion, for intercom & paging. Will accomodate 25/70 V Xformer (order sepatately). 6¼" dia. x 6¼"D	SC-15 ATLAS
15	NO 45 ohm	Round, indoor/outdoor, swivel bracket, 130° dispersion, for intercom & paging. Will accomodate 25/70 V Xformer (order sepatately). 6¼" dia. x 6¼"D	SC-15-45 ATLAS
16	YES 25v/70.7v	Round, aluminum, 110° dispersion, 8¼" dia, 9-3/8" D, indoor/outdoor, perfect for intercom.	QH16T QAM
25	NO 16 ohm	Submergence proof (Mil-Spec) flush mount horn. Not hurt by salt water, steam or mist. 7.3" dia. 3.8" H.	MM-2F UNI
30	YES 25v/70.7v/100v	Rectangular, patented omnidirectional swivel mount system, constant directivity, indoor/outdoor, acrylic-styrene-acrylonitrile, 60° H x 40° V dispersion. 8.9"H x 12.1"W x 12.2"D	PA430T EV

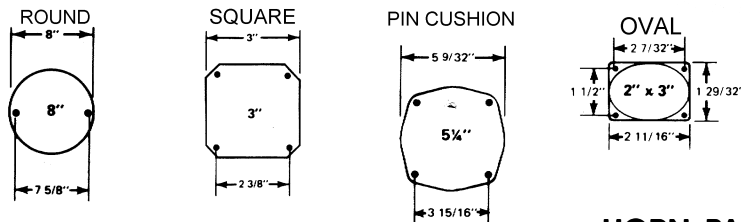

HORN PARTS

Also see SOUND § of this catalog!

Quam

ATLAS SOUND®

- ID60CT UNI** — 60W driver for compound diffraction horns. Features 1 3/8"-18 thread adapters. Compatible with all University horns (except compound diffraction projectors). Built-in 25/70v
- 7110XC UNI** — Explosion proof driver will not create a spark or detonate an explosive atmosphere. 30 watts. 8 ohm. Fits University horns.
- PH UNI** — Directional trumpet horn. No driver. 20.4"
- SH UNI** — Directional trumpet horn. No dirver. 8¾".