




SWITCHES



MINIATURE BAT HANDLE TOGGLE •5 AMPS AC •Mounts in 1/4" hole				
TYPE	POSITIONS*	TERMINATION	PART #	SPECIAL FEATURES
SPDT	ON-ON	PCB	35-053 GC 7101SYCQE	
		SOLDER	35-004 GC 5101SYZQE	
		SOLDER	MTL106D	LOCKING LEVER
	ON-OFF-ON	PCB	3103T00B1S01	
		RAPCB	A1030SD9AB	
		SOLDER	35-005 GC	
	ON-(ON)	PCB	A1080SD9AB	
		SOLDER	35-003 GC 3108T00B1S00	
	ON-OFF-(ON)	PCB	A1070SH3CBE	
SOLDER		7107SYZQE		
(ON)-OFF-(ON)	SOLDER	7105SYZQE		
SP3T	ON-ON-ON	SOLDER	35-009 GC	NEEDS EXTERNAL JUMPERS
DPDT	ON-ON	PCB	35-057 GC 7201SYCQE	
		SOLDER	5201SYZQE	
	ON-OFF-ON	PCB	35-057 GC A2030SH3CBE	
		SOLDER	35-012 GC	
	ON-(ON)	SOLDER	35-0014-BU GC	
	ON-OFF-(ON)	SOLDER	35-151 GC	
(ON)-OFF-(ON)	SOLDER	35-018 GC		
3PDT	ON-ON	SOLDER	7301SYZQE	
	ON-OFF-ON	SOLDER	7303SYZQE	
4PDT	ON-ON	SOLDER	35-036 GC 7401SYZQE	
	ON-OFF-ON	SOLDER	35-038 GC 7403SYZQE	







SLIDE SWITCHES •1/2 amp DC •3 amp AC			
TYPE	CIRCUIT FUNCTION	TERMINATION	PART #
SPST	OFF-ON	SOLDER	46202LE SC
SPDT	ON-ON		46203LE SC
DPDT	ON-ON		46206LE SC
DPDT	ON-(ON)		46206MR SC

NEED HELP FINDING
IT?
CALL US!



*Momentary positions are in parenthesis. Example: An (ON)-OFF-(ON) switch is center "off" (maintained) with momentary "on" positions on either side of center.

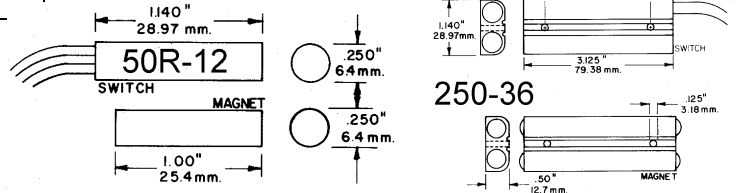

MAGNETIC DOOR SWITCHES, 300 mA			
MOUNTING	CLOSED LOOP-N.O.	OPEN LOOP-N.C.	SHAPE
SURFACE MOUNT	29A GRI	29B GRI	RECTANGULAR
RECESSED	50R-12 GRI	60R-12 GRI*	CYLINDRICAL, 1/4"
RECESSED	2020-12 GRI	3030-12 GRI	CYLINDRICAL, 3/8"
RECESSED (steel door)	180-12 GRI	185-12 GRI*	CYLINDRICAL, 3/4"
FLOOR MOUNT (garage door)	250-36 GRI	260-36 GRI*	RECTANGULAR (extruded aluminum)

*special order item; 2-3 week delivery.
NOTE: N.O. switches are open when the magnet is away from the switch. N.C. switches are closed when the magnet is away from the switch.




SWITCHES



STANDARD TOGGLE SWITCHES (mount in 1/2" hole) 15 - 20 amps @ 125vac

TYPE	POSITIONS*	TERMINATION	PART #
SPST	OFF-(ON)	SCREW	SS206E
	ON-OFF	SCREW	35-167 GC 90-0001 MCG
		SOLDER	SS256L
		SLIDE	35-3005 GC SS206SP-BK SS513-BG* *lighted, 12vdc
SPDT	ON-OFF-ON	SCREW	SS206-15
		SLIDE	SS206P
		SOLDER	84105 ARR
	ON-ON	SCREW	35-130 GC
		SLIDE	92-0003 MCG
	(ON)-OFF-(ON)	SCREW	35-155 GC SS206C
		SLIDE	93-0003 MCG
	ON-OFF-(ON)	SCREW	35-153 GC
ON-(ON)	SCREW	SS206E	
DPST	ON-OFF	SLIDE	35-3045 GC
		SCREW	35-3060 GC SS207-7A-BK
DPDT	ON-OFF-ON	SCREW	35-0148 GC SS208-16 80638 ARR
		SLIDE	35-3025 GC
		SOLDER	35-0149 SS208L
	ON-ON	SCREW	35-0146 GC SS208R
		SOLDER	35-0144 GC SS208RL 81027CE
		SLIDE	SS208RP
	(ON)-OFF-(ON)	SCREW	35-150 GC SS208C
		SLIDE	0121-0012 MCG
	ON-OFF-(ON)	SCREW	35-151 GC
	ON-(ON)	SOLDER	35-154 GC
SCREW		SS208E	
3PST	ON-OFF	SCREW	82612 ARR
3PDT	ON-OFF-ON	SCREW	35-140 GC
	ON-ON	SCREW	35-141 GC SS212-BK
	(ON)-OFF-(ON)	SCREW	0140-3027 McG
4PDT	ON-OFF-ON	SCREW	35-143 GC 7692K13
4PDT	ON-ON	SCREW	0140-4024 MCG

*A parenthesis around a position (ON) indicates a momentary function.
 "ON-OFF" INDICATING PLATE — #1650 MCG
 RUBBER BOOT FOR BAT HANDLE — #35-060-BU GC
 EXTRA HEX NUT — #8947-23AH ARR
 EXTRA KNURLED NUT — #8991-3AS ARR



8991-3AS ARR



8947-232AH ARR




1146 SMITH



35-060 GC





1650 MCG



DIP SWITCH

DIP SWITCHES	
# POSITIONS	PART #
4	DS-04 LAM
6	DS-06 LAM
8	DS-08 LAM



632-S LINE MASTER






FOOT SWITCHES SPST OFF-(ON)	
TYPE	PART #
METAL	632-S LINE MASTER

A-B DATA SWITCH BOXES		
CONNECTOR	# POSITIONS	PART #
BNC	A-B	CA283-2 QVS
	3 to 1	CS3G-BNC
	6 to 1	CS6G-BNC
CENTRONICS, 36F	A-B	SW250 EAZY
DB9F	A-B	SWB-2000
DB25F	A-B	SWB-1000
F	A-B	15-5000 AIM
RJ12	A-B	SWB-4000
RJ45	A-B	CA284-2 QVS
UHF	5 to 1	CSR5G B&W
	6 to 1	CSA6G B&W

SWITCHES



"MICRO" TYPE SWITCHES (momentary action)						
BODY SIZE	OPERATING FORCE	LEVER LENGTH	ROLLER?	CIRCUIT FUNCTION	CURRENT	PART #
.625" H x 1.09" L	400 gms	PLASTIC BUTTON	NO	SPDT	15A @ 125VAC	E34-00A CHE
	400 gms	.81"	YES			E34-00K CHE
	200 gms	1.34"	YES			E34-50K CHE
	50 gms	1.4"	NO			E34-50HX CHE
	30 gms	1.58"	YES			E34-75HX CHE
	13 gms	2.93"	YES			E34-85HX CHE
.64" H x 1.82" L	425 gms	PLASTIC BUTTON	NO	SPDT	15A @ 125-250VAC	E13-00E CHE
	425 gms	METAL BUTTON, THREADED COLLAR	NO			E13-00M CHE E13-00J CHE
	65 gms	1.64"	YES			E13-50K CHE
	100 gms	1.39"	YES			E13-00K CHE
1.125" H x 1.81" L	850 gms	PLASTIC BUTTON	NO	DPDT	15A @ 125-250VAC	E19-00A CHE
	850 gms	METAL BUTTON, THREADED COLLAR	NO			E19-00J CHE E19-00M CHE
	205 gms	1.5"	NO			E19-00H CHE
	150 gms	1.645"	YES			E19-50K CHE
	130 gms	1.75"	NO			E19-50H CHE
1.15" H x 1.94" L	3.5 OZ.	LEVER W/ROLLER	YES	SPDT	15A @ 125-250VAC 1/2A @ 125VDC	BZ-2RW82-A2 (used on elevators)
	6 OZ.	SHORT LEVER W/ROLLER	YES			BZ-2RW82-A2 (used on elevators)





"PUSH-LITE" SWITCHES SQUARE, LIGHTED PUSH-BUTTON (cut-out: 1" x .875")			
MOMENTARY ON-(ON)	SPDT DPDT	PL10325 SC PL106205 SC	2A @ 125V
ALTERNATE ON-ON	SPDT DPDT 4PDT	PL103705 SC PL106705 SC PL112705 SC	
COLORED LENS: PL-501 RED, PL-503 GRN, PL-504 BLU, PL-505 WHT, PL-506 YLW, PL-512 CLR, PL-513 AMBER. Units come with WHITE lens standard. COLORED FILTERS: For use with WHITE or CLEAR lens: PL-301 RED, PL-303 GRN, PL-304 BLU, PL-305 WHT, PL-308 YEL			
LAMPS: Use T-1¼ flange-base lamps (not supplied), 6-28v.			

'UNISWITCH" SQUARE, LIGHTED, PUSHBUTTON cut-out: .62" (15.75 mm)			
MOMENTARY ON-(ON)	SPST (N.O.)	250mA AC contacts	LUS-00-1 SC
LENS: Sold separately. RED (P-2349-1 SC), GREEN (P-2349-3 SC), BLUE (P-2349-4 SC), WHITE (P-2349-5 SC), YELLOW (P-2349-8 SC).			
LAMPS: Use only 6v 0.5w T1-¾ bi-lin lamp (not supplied), #7380 ML.			

SWITCHES


ROTARY SWITCHES 1.5a @ 28VDC CERAMIC			
# POLES	# POSITIONS	SHORTING	NON-SHORTING
1	2-12	PA2002 CEN	PA2001 CEN
2	2-6	PA2003 CEN	PA2045 CEN
2	2-12	PA2004 CEN	PA2005 CEN
3	2-5	PA2006 CEN	PA2007 CEN
3	2-12	PA2008 CEN	PA2009 CEN
4	2-6	PA2010 CEN	PA2011 CEN
4	2-12	PA2012 CEN	PA2013 CEN
5	2-3	-	PA2015 CEN
5	2-12	-	PA2017 CEN
6	2	-	PA2019 CEN
6	2-5	PA2020 CEN	PA2021 CEN
6	2-6	PA2022 CEN	PA2023 CEN
6	2-12	-	PA2025 CEN
8	2-6	-	PA2027 CEN
9	2-5	PA2028 CEN	PA2029 CEN
10	2-3	-	PA2031 CEN
10	2-6	-	PA2033 CEN
12	2	-	PA2035 CEN
12	2-6	-	PA2037 CEN
15	2-3	-	PA2039 CEN
18	2	-	PA2041 CEN

NOT SHOWN--Ack stocks rotary switches other than those shown here. Please inquire.

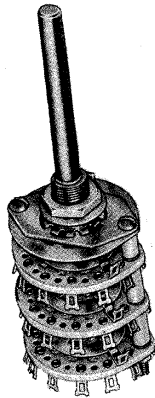

OHMITE TAP SWITCH

POWER TAP ROTARY SWITCHES •break before make •ceramic			
MODEL #	AMPS/VOLTS	# TAPS	BODY DIAMETER
111-3 OHM	15A/125V	3	1-9/16"
111-4 OHM		4	
111-4 OHM		5	
312-3 OHM	30A/300V	3	3-5/16"
312-4 OHM		4	
312-5 OHM		5	
412-12 OHM	50A/300V	12	4-3/16"




ROUND PUSH BUTTON SWITCHES					
TYPE	CIRCUIT FUNCTION	TERMINATION	PART #	HOLE SIZE NEEDED	FEATURES
SPST	(OFF)-ON	SOLDER	PBS-101	1/4"	1/2A @ 125VAC 1A @ 5VDC
SPST	(ON)-OFF	SOLDER	46-101 RED	1/4"	1/2A @ 125VAC 1A @ 5VDC
			201 SC	.375"	1/4A AC, 30W
		SPADE	35-430 GC	1/2"	15A @ 125VAC 1A @ 125VDC
			35-457 GC (red) 35-459 GC (blk)	1.02"	16A 125/250VAC
	ON-OFF	SOLDER	0725-0002 MCG DVR-2703 SC	1/2"	8A @ 125VAC 3A AC
SPDT	(ON)-ON	SOLDER	953 SC (red)	1/4"	1/4A, 30W MAX., AC
			963 SC (blk)		
			903 SC (red)	.469"	
			913 SC (blk)		
			923 SC (blk)	1/4"	
			8121SHZGE	1/4"	
			DVR-2203 SC	1/2"	3A AC 0.5A DC
DPDT	(ON)-ON	SOLDER	35-451 GC	1/4"	1A 120VAC
	ON-ON	PC/SOLDER	35-490 GC (w/indicator eye)	9/16"	4A @ 250VAC 1A @ 100VDC
		SOLDER	DVR-2706 SC	1/2"	3A AC 0.5A DC
			81117 ARR (foot switch)		6A @ 125VAC

CANT FIND IT? ACK STOCKS OTHER SWITCHES NOT SHOW HERE. CALL US.



953 & 963 SC



DVR



903 & 913 SC



201 SC




933 SC




35-490 GC



SPST
35-457 GC



Note: pictures are not to the same scale!



81117




100-L MCG


SWITCHES



ED-903 SC






E-903 SC



921K SC

CORD SWITCHES (In-Line, Free-Hanging)	
Momentary push-button switch mounted in an XLR audio housing. Takes up to a 1/4" cable. Switch is rated at 1/4A, 30W AC.	ED-903 SC (red) ED-913 SC (blk)
Nickel-plated housing with push-button momentary switch. Takes up to a .375" cable.	E-903 SC (red) E-913 SC (blk)
Plastic housing with push-button momentary switch prewired with 6' of 2 conductor unshielded cable (stripped and tinned end).	921K SC
IN-LINE CORD SWITCH — Feed-thru type. 6A 125V. SPST. Insulation piercing terminals.	38-1851 GC

ROCKER SWITCHES w/QC TERMINALS				
CONFIG	CIRCUIT	PART #	MOUNTING HOLE	RATING
SPST	ON-OFF	35-656 GC YEL LIGHTED 120VAC	.75" x 1.44"	15A 125VAC
		35-662 GC YEL NEON 35-664 GC GRN NEON 35-688 GC RED NEON	.453" x 1.11"	15A 125VAC 20A 28VDC
		35-688 RED LIGHTED		
		35-681 GC GRN LED 35-682 RED LED	.512" x .75"	5A 125VAC
		35-660 GC YEL LIGHTED 12V	.550" x 1.125"	16A 125VAC 20A 28VDC
		35-689 GC RED NEON	1.1" x .48"	15A 125VAC
SPDT	(ON)-OFF-(ON)	35-695 GC	.453" x 1.11"	15A 125VAC 20A 28VDC
DPST	ON-OFF	30-866 PHI	.866" x 1.19"	20A 125VAC
		35-645 GC BLK 35-655 GC RED	1" x 1 1/4"	20A 125VAC
		35-686 GC RED LIGHTED	1-3/16" x 7/8"	16A 125VAC
	(ON)-OFF	2603-11E ARR	-	16A 250VAC
DPDT	ON-OFF	82.42.82.95.9E	.866" x 1.205"	20A 125VAC
		0811-0312 McG	.67" x .437"	20A 125VAC (2 hole mounting)
		162B2NN SC	.508" x .78"	6A 125VAC



HARD TO FIND? Don't despair...Ack stocks more switches than are listed in this catalog. Give us a holler. Our land lines are open M-F, 8-5.