

WIRE & CABLE



SELECTION GUIDE Multiconductor Belden Cables •Stranded •PVC Jacket



AWG	2 COND.	3 COND.	4 COND.	5 COND.	6 COND.	7 COND.	8 COND.	9 COND.	10 COND.	12 COND.	14 COND.
24 AWG UNSHIELDED	8782	-	-	-	-	-	-	-	-	-	-
24 AWG SHIELDED	8641 (O) 9452 (O)	9533*	9502 (O) 9534 (O)	9535 (O)	9503 (O) 9536 (O)	9537 (O)	9504 (O) 9538 (O)	9539 (O)	9505 (O) 9540 (O)	9506 (O) 9731 (I)	9507 (O)
22 AWG UNSHIELDED	8442 9407 9712	8443	8444 9744	8445	9745	9430	9421	9723*	8456	8457	-
22 AWG SHIELDED	8437 (B) 8441 (B) 8737 (S) 8761 (O) 9451 (O)	8771 (O)	8723 (I) 9328 (I)	8788*	8777 (I) 9513 (O)	9943*	9514 (O)	9945*	9946*	1218B (I) 8778 (I) 9516 (O)	-
20 AWG UNSHIELDED	8205 8649	9492*	9444	9445	9750*	9439	-	9455*	-	9457*	-
20 AWG SHIELDED	8762 (O) 9154 (O)	8772 (O)	8722 (1/2) 9155 (O)	-	-	-	8725*	-	9902*	9886 (I)	-
18 AWG UNSHIELDED	8452 8460 8461 8478	8453 9493	8454 8489	8465	-	8467	9405 2/16+6/18	8469 - 8449 2/18+7/22	9159*	8466	-
18 AWG SHIELDED	8760 (O) 8790 (S)	8770 (O) 8791 (S)	9418 (O)	-	9773 (I)	-	9554*	-	-	9556*	-
16 AWG UNSHIELDED	8470 8471 8472 8677 9716	9494*	8620	9620*	-	8621	9721*	9621*	-	8622	-
16 AWG SHIELDED	8408 (S) 8719 (O)	8618 (O)	-	-	-	-	-	-	-	1040A*	-
14 AWG UNSHIELDED	8473 8675 9717	8479	8627	9623*	-	8628*	1811A*	-	-	8629*	-
14 AWG SHIELDED	8720 (O)	9367 (O)	83754*	-	83756*	-	-	-	-	-	-
12 AWG UNSHIELDED	8477 8673	-	-	-	-	-	-	-	-	-	-
12 AWG SHIELDED	8718 (O)	83803*	83804*	-	83806*	-	-	-	-	-	-
10 & 8 AWG UNSHIELDED	8678 (10) 9679 (8)	-	-	-	-	-	-	-	-	-	-
	2	3	4	5	6	7	8	9	10	12	14

*non-stock item, but Ack can order it for you!

(B)=Braid shield (I)=Individually shielded pairs (O)=Overall foil shield (S)=Spiral shield

**Check Ack's web site for price & availability:
acksupply.com**


SELECTION GUIDE (CON'T) Multiconductor Belden Cables •Stranded •PVC Jacket

AWG	15 COND	16 COND	18 COND	19 COND	20 COND	22 COND	24 COND	25 COND	30 COND	38 COND	40 COND	50 COND	54 COND	100 COND
25 AWG SHIELDED	-	1214A*	9809 (O)	-	-	-	9812*	9637 (O)	-	-	-	1401A	-	-
24 AWG UNSHIELDED	-	-	-	-	-	-	1513B*	-	-	-	-	-	-	-
24 AWG SHIELDED	9541 (O)	9508 (O)	9509*	-	9510 (O) 9542 (O)	9733*	9993*	9543 (O)	9515 (O)	-	9545 (O)	9525 (O) 9546 (O)	-	9550 (O)*
22 AWG UNSHIELDED	8458	-	8748*	-	9431	-	9747*	8459	8749 9432	-	9433*	9434*	8750*	-
22 AWG SHIELDED	9947*	8308*	1219B (I) 8774 (I)	83569*	8310*	8775 (I)	9768 (I)	9948*	8776 (I)	8769 (I)	1225B*	9950*	8773 (I)	-
20 AWG UNSHIELDED	9458	-	9752*	-	-	-	-	-	9755*	-	-	-	-	1062A*
20 AWG SHIELDED	-	1057A*	9875*	-	-	9876*	1058A*	-	9879*	-	1091A*	-	-	1082A*
18 AWG UNSHIELDED	8468	9161*	8692*	8619*	-	-	9741*	9626*	9742*	-	-	-	-	-
18 AWG SHIELDED	-	1065A*	9559*	-	-	9563*	1066A*	-	9565*	-	-	-	-	1088A*
16 AWG UNSHIELDED	8623	9427*	-	8624*	9429*	-	-	9622*	-	-	-	-	-	-
16 AWG SHIELDED	83715*	1485A*	-	83719*	-	-	-	-	-	-	1044A*	-	-	1090A*

*Non-stock item, but Ack will gladly order it for you.
(B)=Braid shield (I)=Individually shielded pairs (O)=Overall foil shield (S)=Spiral shield

ACK CUTS CABLE! The most economical way to buy wire is on a 500' or 1000' roll. However, if you need less, just tell us and we will gladly *cut it to length* (25' minimum)!

Check Ack's web site for price & availability: acksupply.com



LOW CAPACITANCE CABLES (RS422 Applications) Foil Shield Twisted Pairs Stranded PVC Jacket				
	BELDEN #	# PAIRS	O.D.	CAPACITANCE pF/ft.
28 AWG	9809	9	0.29	15.5
24 AWG	9729	2*	0.317	12.5
	9731	6*	0.421	12.5
22 AWG	9696	2	0.29	16

*each pair individually shielded.



SOLID WIRE			
AWG	# COND.	SHIELD?	BELDEN #
24	2 PAIR	NONE (level 5 datatwist)	1588A
24	4 PAIR	NONE (level 5 datatwist)	1583A
22	1 PAIR	BRAID	8437
22	1 PAIR	FOIL	8450
22	2 PAIR	BRAID + FOIL (computer POS cable)	9696
22	4 COND.	NONE (telephone station wire)	30-9901 GC (100')
22	6 PAIR	EA. PAIR SHIELDED	8768
22	11 PAIR	EA. PAIR SHIELDED	8765
18	2 COND.	FOIL (fire alarm & tray cable)	9575

TELEPHONE WIRE: See "Telephone" § of catalog.

WIRE & CABLE

Belden

COAX (most popular in italics)		
TYPE	BELDEN #	NOTES
<i>RG6</i>	<i>1189A BEL</i>	<i>75 ohm; QUAD SHIELD for cable TV</i>
RG6A	8215 BEL	75 ohm; MATV; 2 BRAID SHIELDS
RG6	9114 BEL	75 ohm; MATV; FOIL + BRAID SHIELD
RG6	9248 BEL	75 ohm; FOIL + BRAID SHIELD; GAS INJECTED; SWEEP TESTED TO 450 MHZ
RG6 PLENUM	82248 BEL	75 ohm; PLENUM RATED
RG8	8214 BEL	50 ohm; FOAM; 11 awg non-standard center conductor. Use connectors that fit 9913 Bel.
RG8	8237 BEL	52 ohm; mil-spec. 13 awg center conductor.
<i>RG8X</i>	<i>9258 BEL</i>	<i>50 ohm; MINI-8</i>
RG8 THICKNET	9880 BEL	50 ohm; THICKNET TRUNK CABLE
RG8	9913 BEL	50 ohm; LOW LOSS. 10 awg center conductor.
RG11A	8261 BEL	75 ohm; mil-spec
RG11	9292 BEL	75 ohm; CATV cable
RG58A	8219 BEL	50 ohm; STRANDED; FOAM DIELECTRIC
<i>RG58</i>	<i>8240 BEL</i>	<i>53.5 ohm; SOLID</i>
RG58A	8259 BEL	50 ohm; STRANDED
RG58C	8262 BEL	50 ohm; NON-CONTAMINATING
RG58A TRIAX	9222 BEL	50 ohm; COMPUTER TRIAX
<i>RG58 THINNET</i>	<i>9907 BEL</i>	<i>50 ohm; THINNET</i>
RG58 PLENUM	82240 BEL	53.5 ohm; RG58 PLENUM
RG58 THINNET PLENUM	82907 BEL	50 ohm; PLENUM THINNET
RG59	8221 BEL	80 ohm; FOAM DIELECTRIC
RG59 TRIAXIAL	8232 BEL	75 ohm; VIDEO TRIAXIAL
RG59 TRIAXIAL	8232A BEL	75 ohm; VIDEO TRIAXIAL
<i>RG59</i>	<i>8241 BEL</i>	<i>75 ohm; SOLID</i>
RG59B	8263 BEL	75 ohm; NON-CONTAMINATING JACKET
RG59	9259 BEL	75 ohm; STRANDED, FOAM DIELECTRIC
RG59	9274 BEL	75 ohm; SWEEP TESTED 5-450 MHZ
RG59	9275 BEL	75 ohm; CATV, FOIL & BRAID SHIELD
RG59 DUAL	9555 BEL	75 ohm
RG59 PLENUM	82241 BEL	75 ohm

LENGTH: Standard rolls are 500' or 1000' or Ack will cut it to length.

COAX (most popular in italics)		
TYPE	BELDEN #	NOTES
RG62B	8255 BEL	93 ohm; COMPUTER; NON-CONTAMINATING
RG62A	9268 BEL	93 ohm; COMPUTER; MYLAR TAPE (IMPROVED OUTDOOR)
<i>RG62A</i>	<i>9269 BEL</i>	<i>93 ohm; COMPUTER, LOW CAPACITY</i>
RG62 PLENUM	89269 BEL	93 ohm; PLENUM VERSION OF 9269 BELDEN.
RG142B TEFLON	83242 BEL	50 ohm; 2 SILVER COATED BRAIDS
<i>RG174</i>	<i>8216 BEL</i>	<i>50 ohm; MINIATURE; COMPUTER & VIDEO</i>
RG179 TEFLON	83264 BEL	75 ohm; SILVER COATED BRAID
RG187A TEFLON	83267 BEL	75 ohm; SILVER COATED BRAID
RG188A TEFLON	83269 BEL	50 ohm; SILVER COATED BRAID
<i>RG213</i>	<i>8267 BEL</i>	<i>50 ohm; NON-CONTAMINATING (OUTDOOR) VERSION OF RG8</i>
RG214	8268 BEL 4064 INT'L	50 ohm; NON-CONTAMINATING; 2 SILVER BRAIDS
RG223	9273 BEL 4072 INT'L	50 ohm; NON-CONTAMINATING; 2 SILVER BRAIDS
RG402 TEFLON	1673A BEL	50 ohm; MICROWAVE; 19 AWG
RG405 TEFLON	1671A BEL	50 ohm; MICROWAVE; 24 AWG
VIDEO	1505A BEL	75 ohm; PRECISION VIDEO; FOIL + BRAID SHIELD
VIDEO	8279 BEL	75 ohm; PRECISION VIDEO; BRAID SHIELD
<i>VIDEO</i>	<i>8281 BEL</i>	<i>75 ohm; DOUBLE SHIELD</i>
VIDEO	8281F BEL	75 ohm; HI FLEX version of 8281.
VIDEO	9141 BEL	75 ohm. INDOOR only version of 8281.
VIDEO	9209 BEL	75 ohm; PRECISION; FOIL SHIELD
VIDEO	9231 BEL	75 ohm; non-contaminating (OUTDOOR) version of 8281 BEL.
<i>VIDEO</i>	<i>8218 BEL</i>	<i>75 ohm; MINIATURE VIDEO & COMPUTER; 20.5 pf/foot</i>
VIDEO	9221 BEL	75 ohm; MINIATURE VIDEO & COMPUTER; 17.3 pf/foot

LENGTHS: Standard rolls are 500' & 1000' (but we also cut rolls).





9397 BEL

WIRE & CABLE



MICROPHONE CABLE (cut to length or on 500'/1000' rolls)

# COND.	AWG	O.D.	JACKET	COLOR	NOTES	PART #
1	25	0.144	PVC	CHROME	Braid shield.	8411 BEL
1	25	0.199	PVC	CHROME	Braid shield.	8401 BEL
1	25	0.245	RUBBER	BLACK	Braid shield, cotton yarn wrap.	8410 BEL
1	18	0.235	NEOPRENE	BLACK	Spiral shield, paper tape.	9395 BEL
2	24	0.135	PVC	BLACK	Foil shield, drain wire, noise reducing tape.	9452 BEL
2	24	0.176	PVC	BLACK	Double spiral shield, fillers.	9397 BEL
2	24	0.185	PVC	CHROME	Braid shield, fillers.	8420 BEL
2	24	0.199	RUBBER	BLACK	Braid shield, fillers, cotton spiral.	8413 BEL
2	24	0.2	RUBBER	BROWN	Braid shield, fillers, cotton spiral.	9399 BEL
2	22	0.231	PVC	CHROME	Braid shield, cotton braid.	8422 BEL
2	22	0.2	PVC	BLACK	Braid shield, polyester tape, twisted pair.	8437 BEL
2	22	.21	PVC	BLACK	Braid shield, twisted pair.	8441 BEL
2	20	0.262	RUBBER	BLACK	Braid shield, cotton wrap.	8412 BEL
2	20	0.263	HYPALON	BROWN	Braid shield, cotton wrap.	8402 BEL
2	18	0.29	NEOPRENE	BLACK	Braid shield, cotton wrap.	8428 BEL
2	18	0.38	HYPALON	BROWN	Braid shield, paper wrap, cotton wrap.	8408 BEL
3	24	0.185	PVC	BLACK	Dual spiral shield, fillers.	9398 BEL
3	24	0.223	RUBBER	BLACK	Braid shield, cotton serve, fillers, cotton spiral.	8406 BEL
3	20	0.244	PVC	CHROME	Braid shield.	8403 BEL
3	20	0.272	RUBBER	BLACK	Braid shield, cotton wrap.	8423 BEL
4	28	0.115	PVC	BLACK	Silver plated conductors, braid shield.	1804A BEL
4	24	0.245	PVC	*	"Brilliance" cable. Braid shield. MIDI applicatons.	1192A BEL
4	20	0.252	PVC	CHROME	Braid shield.	8404 BEL
4	20	0.294	RUBBER	BLACK	Braid shield, cotton wrap.	8424 BEL
5	20	0.281	PVC	CHROME	Braid shield.	8405 BEL
5	20	0.318	RUBBER	BLACK	Braid shield, cotton wrap.	8425 BEL
6	20	0.342	RUBBER	BLACK	Braid shield, cotton wrap.	8426 BEL
7	20	0.355	RUBBER	BLACK	Braid shield, cotton wrap.	8427 BEL
8	20	0.381	RUBBER	BLACK	Braid shield, cotton wrap.	8418 BEL

*Available in black, white, red or blue



WIRE & CABLE



AUDIO CABLE Twisted Pair/Unshielded		
AWG	UNJACKETED	JACKETED
24	-	8641 BEL (shielded)
22	9151 BEL*	8442 BEL
20	9152 BEL*	8205 BEL
18	8460 BEL	8461 BEL
16	8470 BEL	8471 BEL

*Non stock item; 2-3 week delivery.
LENGTH: Specify length when ordering!


COPPERWELD* ANTENNA WIRE			
AWG	LENGTH	TYPE	PART #
12	100'	SOLID	AN-122 CRO
	150'		AN-123 CRO
14	100'		AN-142 CRO
	150'		AN-143 CRO
18	250'		AN-181 CRO
14	100'		STRANDED

*Copper coated steel wire for both strength & conductivity. The ideal wire for making antennas!

BUS BAR WIRE Solid Tinned Copper 100' Lengths	
AWG	BELDEN PART #
30	8025-100
28	8024-100
26	8023-100
24	8022-100
22	8021-100
20	8020-100
18	8019-100
16	8013-100
14	8012-100
12	8011-100

PHONE NUMBERS

BELDEN 800-BELDEN-1
DABURN 201-768-9642
B&W 215-788-5581



BRAID •Tinned •Copper		
TUBULAR I.D.	RECOMMENDED MAX. CURRENT	PART #
7/64	22A	2350-7/64 DAB
11/64	36A	8668 BEL
7/32	38A	8663 BEL
13/64	46A	8661 BEL
1/2	62A	8669 BEL
25/32	80A	8662 BEL
1	120A	2350-1 DAB
3/4 FLAT	145A	8670 BEL

CAT 5 CABLE •24 AWG		
BELDEN #	# PAIRS	SPECIAL FEATURES:
1588A	2	
1590A	2	PLENUM RATED
1583A	4	MOST POPULAR Solid Wire, PVC
1624R	4	SHIELDED
1752A	4	STRANDED
1585A	4	PLENUM RATED
1872A	4	MEDIA-TWIST

HOOK-UP WIRE, PVC •Tinned Copper •1000V •80°C 100' or 1000' Spools		
AWG	STRANDED PART #	SOLID PART #
24	8525 BEL	8538 BEL
22	8524 BEL	8530 BEL
20	8523 BEL	8529 BEL
18	8522 BEL	N/A
16	8521 BEL	
14	8520 BEL	
12	8527 BEL	

HOOK-UP WIRE, TEFLON •105°C •600V •Stranded •Silver Coated Copper		
AWG	BELDEN PART #	COLORS
22	83006-100'	Brown, red, orange, yellow, green, blue, purple, gray, white, & black. PICK ONE!
20	83007-100'	

Did you know? "AWG" stands for "American Wire Gauge." In the AWG system, the conductor area doubles with each reduction of three numbers in the AWG. For instance, a 13 AWG wire has twice the copper of a 16 AWG wire.

COLORS: Brown, red, orange, yellow, green, blue, purple, gray, white, or black.
SPECIFY A COLOR!

WIRE & CABLE




MAGNET WIRE			
GAUGE	POUNDS	APPROX. FEET	DABURN PART #
10	1 LB.	32	DHF-10-1
12		52	DHF-12-1
14		79	DHF-14-1
16	½ LB.	125	DHF-16-1/2
18		140	8049 BEL
20		160	8050 BEL
22		254	8051 BEL
24		404	8052 BEL
26		645	8053 BEL
28		1020	8054 BEL
30		1615	8055 BEL
32		2515	8056 BEL
34		4060	8057 BEL
36		6400	8058 BEL
38		19360	DHF-38-1/2
40	31940	DHF-40-1/2	



CUSTOM CABLES—

Ack will make up a special cable for you complete with connectors. Another value-added service from Ack!

Shorting Fold



COMPUTER CABLES

COMPUTER CABLES (EIA RS232 & CAD/CAM) •Foil Shield •Stranded •PVC Jacket				
AWG	BELDEN #	# COND.	O.D.	CAPACITANCE pF/ft.
28 AWG	9637	25 cond.	0.305	30
AWG	BELDEN #	# PAIRS	O.D.	CAPACITANCE pF/ft.
24 AWG	9501	1 pair	0.156	40
	9502	2	0.222	30
	9503	3	0.232	30
	9504	4	0.265	30
	9505	5	0.289	30
	9506	6	0.289	30
	9507	7	0.294	30
	9508	8	0.324	30
	9509*	9	0.324	30
	9510	10	0.368	30
	9515	15	0.413	30
	9519*	19	0.448	30
	9525	25	0.503	30
	9550	50	0.708	30

*non-stock item, special order.

Z-Fold®



88723




89999

PLENUM CABLE •Stranded •Multi-conductor •Teflon insulated, flamarrest jkt				
AWG	# COND.	SHIELD?	pF/ft.	BELDEN #
18	2	OVERALL	43	82760
22	2	OVERALL	30	82761
22	2	OVERALL	18.9	89999*
22	4 (2 pr.)	EACH PAIR	35	82723
24	4	NONE/Cat 5	15	1590A
24	8	NONE/Cat 5	15	1585A
24	9	OVERALL	20	83509


*AppleTalk LAN Cable, twinaxial.



82761




Ripcord
1585A



ROTOR CABLE •8 conductor	
AWG	BELDEN #
2 ea 16 awg 6 ea 18 awg	9405
2 ea 18 awg 6 ea 22 awg	8448

WIRE & CABLE



ACK CUTS CABLE!

The most economical way to buy wire is on a 500' or 1000' roll. However, if you need less, just tell us and we will gladly *cut it to length* (25' minimum)!

RIBBON (FLAT) CABLE 28 AWG PVC Fits standard .100" IDC Connectors		
# COND.	PARALLEL COND. (gray)	TWISTED COND. (multi-colored)
10	9L28010	9V28010
14	9L28014	9V28014
16	9L28016	9V28016
20	9L28025	9V28025
25	9L28025	9V28025
26	9L28026	9V28026
34	9L28034	9V28034
36	9L28036	9V28036
37	9L28037	9V28037
40	9L28040	9V28040
50	9L28050	9V28050
60	9L28060	9V28060
64	9L28064	9V28064

SPEAKER WIRE* Parallel Wires Clear	
AWG	PART #
10	14-210 GC
12	SK12 SUP
14	14SW SUP 9717 BEL
16	9716 BEL
18	9708 BEL
20	8649 BEL
22	9712 BEL
24	8782 BEL
*When ordering, specify # of feet required.	

ZIP (LAMP) CORD Parallel Wires 300v 250' Std Length	
AWG	PART #
18	19122 BEL
16	19126 BEL
COLORS: Brown, White, Black, or Gray. PICK ONE!	

TWINAX			
BELDEN #	O.D.	IMPEDANCE	CAPACITANCE pF/ft.
9182	0.35	150	8.8
9207 (IMB 7362211)	0.33	100	15.5

LET ACK SHIP YOUR PARTS! Phone in your order and let us send it to you via UPS. *It's easy!*

CUSTOM CABLES — Ack will make up a special cable for you complete with connectors, if you so wish. Another value-added service from Ack!

TEST PROD WIRE Super Flexible Rubber		
AWG	PART #	FEATURES
24	8890 BEL	MINIATURE—Red or black. 1KV
20	8879 BEL	RETRACTILE—1 pair red & black, 60" extended. 5KV
18	8899 BEL	STANDARD—Red, black, white, green or white. 5KV
18	8898 BEL	LARGE, HI VOLTAGE—Red or black. 10KV
18	8866 BEL	LARGE, HI VOLTAGE—Red, not flexible. 40KV DC
LENGTHS: 100 & 500' rolls (or Ack will cut it for you, 25' minimum).		








*Check Ack's web site for
price & availability:
acksupply.com*



WIRE & CABLE




RETRACTILE (COILED) CORDS				
AWG	# COND.	LENGTH retracted/extend	SHIELDING	BELDEN #
75 OHM VIDEO COAXIAL, 21 pF/ft.				
25	1	24"/8'	OVERALL	9449
KEYBOARD				
26	7	14.5"/6'	OVERALL	9665
GENERAL PURPOSE				
28	3	11"/6'	1 shld. 2 unshld.	9466
28	4	12"/6'	NONE	8409
28	5	15"/7.5'	1 shld. 4 unshld.	9465
28	5	12"/6'	1 shld. 4 unshld.	9467
24	1	7.5"/4'	OVERALL SPIRAL	8499
23	3	11.5"/6'	1 shld. 2 unshld	8497
23	3	30"/15'	1 shld. 2 unshld.	9417
23	4	11.5"/6'	NONE	8415
23	4	12"/6'	2 indiv. shld. 2 unshld.	8491
23	5	11.5"/6'	NONE	8490
TEST PROD WIRE				
20	1 PAIR, RED & BLK	8"/60"	NONE	8879
NEOPRENE JACKET (SVO & SJO)				
18	2	24"/12'	NONE	9476
18	2	48"/25'	NONE	9477
18	3	24"/12'	NONE	9478
16	3	12"/6'	NONE	8603

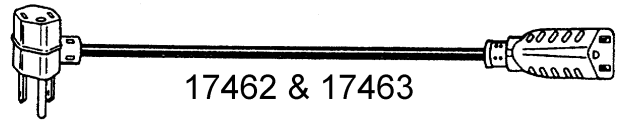


AC EXTENSION CORDS 3 conductor				
BELDEN #	LENGTH	CONNECTOR ARRANGEMENT	TYPE CORDAGE	AWG
17462	8'	1M & 1F to 1F	SJT	16
17461	10'	1M to 1F	SJ	16
17463	15'	1M & 1F to 1F	SJT	16
WD-0656 GC6	25'	1M to 1F	SJTW-A (blue)	16
17475	25'	1M to 2F	SJO	16
WD-0657 GC	50'	1M to 1F	SJTW-A (blue)	16
17676	50'	1M to 2F	SJT	14

CORD STRAIN RELIEFS			
APPROX. CABLE SIZES:	USE WITH CABLE TYPES:	HOLE SIZE NEED	PART #
.12 x .22 flat wire	SPT-1	7/16	938 SMI
1/4 - 19-64 dia. round cord	SV, SVT, HPD	1/2	939 SMI
1/4 - 19/64 dia. round cord	SV, SVT, HPD	1/2	825 SMI (right angle)
.15 x .4 flat wire	SPT-2, HPN	1/2	822 SMI
.33 - .36 dia. round cord	SJ, SJT, SJO	5/8	823 SMI
.36 - .43 dia. round cord	S, ST, SJT	3/4	826 SMI (right angle)
.433 dia. round cord	SJT 14/3	.78"	65-1055 PHI
STRAIN RELIEF TOOL—For assembly & disassembly of strain reliefs. WS40 PHI			



CALL ACK FOR LATEST PRICING!
(Quantity breaks apply to most items)
or
Check Ack's web site for price & availability: acksupply.com


WORK LIGHT—Yellow Jacket work light with protective steel guard. Full lifetime guarantee. 25' long. 16 awg, 3 conductor SJTW-A. **WD-2893 GC**



WIRE & CABLE

Belden

POWER SUPPLY CORDS				
BELDEN #	# WIRES	LENGTH	AWG	TYPE CORD
115VAC PLUG END #1 PIG TAILS END #2				
17106	2 wire	6'	18	SPT
17109	2 wire	9'	18	SPT
17237	3 wire	6'	18	SVT
17239	3 wire	6'	18	SVT
17236	3 wire	6'	18	SV
17238	3 wire	8'	18	SV
17407	3 wire	8'	18	SJT
17406	3 wire	6'	18	SJ
17409	3 wire	8'	18	SJO
17412	3 wire	12'	18	SJ
17419	3 wire	9'	16	SJ
17425	3 wire	15'	16	SJ
17629	3 wire	9'	14	SJ
17516	3 wire	6' 7"	14	SJT
FEMALE EAC END #1 115VAC PLUG END #2				
17250	3 wire	7' 6"	18	SVT
17745	3 wire (right angle female)	6' 7"	18	SVT
17502	3 wire	6' 7"	16	SJT
17504	3 wire	6' 7"	14	SJT
17505	3 wire	9' 10"	14	SJT
FEMALE EAC END #1 MALE EAC END #2				
17753	3 wire	3' 3"	18	SVT
STANDARD AC PLUG END #1 APPLIANCE FEMALE END #2				
17280	3 wire	7' 5"	18	SVT



17106 & 17109




3 COND. AC PLUG TO PIG TAILS




17749




17250




17745

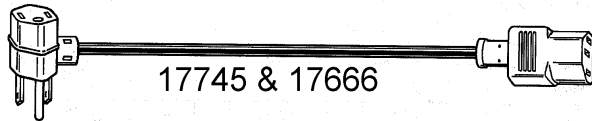


17745 & 17666



17753




17280




17280


EAC POWER CORD RECEPTACLES



EAC-306 SC



EAC-309 SC



EAC-303
RIGHT ANGLE PC

Primary power receptacles designed for use in European or U.S. equipment:

Male, panel, 90° pcb **EAC-903 SC**

Male, panel, 180° solder terminals **EAC-309 SC**

Male, panel, 180° terminals, fused & filtered **6J4 MALLORY**


Female, panel, 180° solder terminals **EAC-306 SC**

Female, free hanging, 180° **704/00/00 QUALTEK**

WIRE & CABLE



PORTABLE CORDAGE			
BELDEN #	TYPE	# COND.	AWG
19122	SPT-1 (lamp cord) brown, black, gray, or white	2	18
19126	SPT-2 (lamp cord) brown, black, gray, or white	2	16
8452	SV-2 (serrated black rubber)	2	18
19120	SV-2 (smooth black or gray rubber)	2	18
8478	SJ-2 (black rubber)	2	18
8472	SJ (black rubber)	2	16
19204	SO (black neoprene w/cotton separator)	2	18
19201	SO (black neoprene w/paper separator)	2	12
19349	SJT (gray PVC)	3	16
19364	SJT (black PVC)	3	14
19350	SVT (gray PVC)	3	18
19402	SVT (black PVC)	3	18
19129	SJ (black rubber)	3	18
8479	SJ (black rubber)	3	14
8453	SV (black rubber)	3	18
19229	SJO (black neoprene)	3	18
19230	SJO (black neoprene)	3	16
8454	black rubber	4	18
8455	black rubber	5	3ea 20 awg 2ea 18 awg
9998	SJT (blue or gray pvc, low leakage)	3	16



19122 & 19126



8452 & 19120 & 19204



8478 & 8472



19201




Paper Tape Separator
Serrated Jacket
19349




Beldfoil®
100% Shield Coverage
19364



Paper Tape Separator
Serrated Jacket
19350




8455



9998
Paper Tape
Separator

CUSTOM CABLES—Ack will make up a special cable for you complete with connectors, if you so wish. Another value-added service from Ack!



LACING CORD—For flexible cable harnesses requiring resistance to vibration and abuse. A flat nylon tape impregnated with fungicidal wax. Distributes stress evenly over a wide area. Strong, tough, and stable. Mil-spec. **C134B** (25 lbs. test, .062" width, 500 yds./roll, black) **C134W** (same as C134B except white) **C136B** (50 lbs. test, .090" width, 500 yds./roll, black) Made by **Cole -Flex**